


SDP86XX

Optoschmitt Detector

FEATURES

- Side-looking plastic package
- 55° (nominal) acceptance angle
- Wide sensitivity ranges
- TTL/LSTTL/CMOS compatible
- Buffer (SDP8600/8601/8602) or inverting (SDP8610/8611/8612) logic available
- Three different lead spacing arrangements
- Mechanically and spectrally matched to SEP8506 and SEP8706 infrared emitting diodes

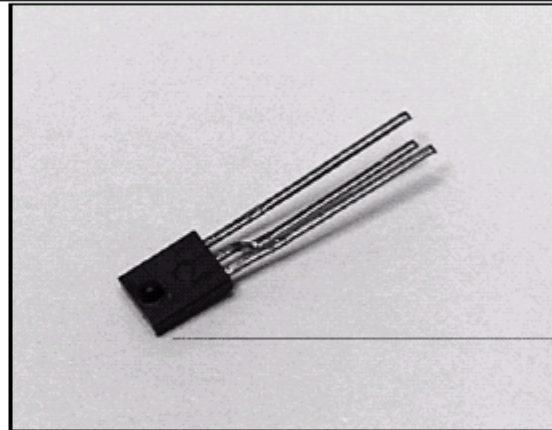

MPFA-6.TIF

DESCRIPTION


The SDP86XX series is a family of single chip Optoschmitt IC detectors molded in a side-looking black plastic package to minimize the effect of visible ambient light. The photodetector consists of a photodiode, amplifier, voltage regulator, Schmitt trigger and an NPN output transistor with a 10 kΩ (nominal) pull-up resistor. Output rise and fall times are independent of the rate of change of incident light. Detector sensitivity has been internally temperature compensated. Flexibility of use is enhanced by a choice of three different lead configurations: in-line (SDP8601/8611), 0.05 in. (1.27 mm) offset pin circle (SDP8600/8610) and 0.10 in. (2.54 mm) offset center lead (SDP8602/8612).

Device Polarity:

- Buffer - Output is HI when incident light intensity is above the turn-on threshold level.
- Inverter - Output is LO when incident light intensity is above the turn-on threshold level.

OUTLINE DIMENSIONS in inches (mm)

Tolerance 3 plc decimals ±0.005(0.12)
2 plc decimals ±0.020(0.51)

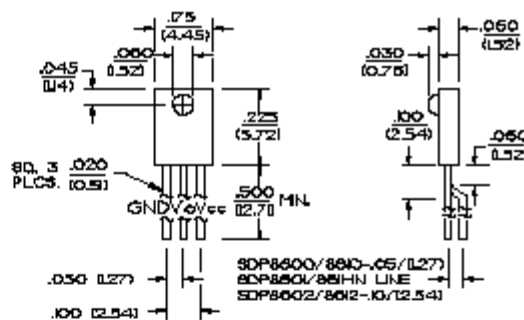

DIM_003.dwg

SDP86XX Optoschmitt Detector

ELECTRICAL CHARACTERISTICS (-40°C to +85°C unless otherwise noted)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Operating Supply Voltage	V _{CC}	4.5		12.0	V	T _A =25°C
Turn-on Threshold Irradiance	E _{TH} (H)				mW/cm ²	V _{CC} =5 V T _A =25°C (1)
SDP86XX-001			2.5			
SDP86XX-002			1.2			
SDP86XX-003			0.6			
Hysteresis (2)	HYST	5		30	%	
Supply Current	I _{CC}			12.0 15.0	mA	E _{IN} =0 Or 3.0 mW/cm ² V _{CC} =5 V V _{CC} =12 V
High Level Output Voltage	V _{OH}				V	V _{CC} =5 V, I _{OL} =0 E _{IN} =3.0 mW/cm ² E _{IN} =0
SDP8600/8601/8602		2.4				
SDP8610/8611/8612		2.4				
Low Level Output Voltage	V _{OL}			0.4 0.4	V	V _{CC} =5 V, I _{OL} =12.8 mA E _{IN} =0 E _{IN} =3.0 mW/cm ²
SDP8600/8601/8602				0.4		
SDP8610/8611/8612				0.4		
Internal Pull-Up Resistor	R _{PULL}	5.0	10.0	20.0	kΩ	
Operate Point Temperature Coefficient	OPPTC		-0.75		%/°C	Emitter @ Constant Temperature
Output Rise Time	t _r		60		ns	R _L =300 Ω, C _L =50 pF
Output Fall Time	t _f		15		ns	R _L =300 Ω, C _L =50 pF
Propagation Delay, Low-High, High-Low	t _{PLH} , t _{PHL}		5.0		µs	R _L =300 Ω, C _L =50 pF
Clock Frequency				100	kHz	R _L =300 Ω, C _L =50 pF

Notes

- It is recommended that a bypass capacitor, 0.1 µF typical, be added between V_{CC} and GND near the device in order to stabilize power supply line.
- The radiation source is an IRED with a peak wavelength of 935 nm.
- Hysteresis is defined as the difference between the operating and release threshold irradiances, expressed as a percentage of the operate threshold intensity.

ABSOLUTE MAXIMUM RATINGS


(25°C Free-Air Temperature unless otherwise noted)

Supply Voltage	12 V (1)
Duration of Output Short to V _{CC} or Ground	1.0 sec
Output Current	18 mA
Operating Temperature Range	-40°C to 85°C
Storage Temperature Range	-40°C to 85°C
Soldering Temperature (5 sec)	240°C

Notes

- Derate linearly from 25°C to 5.5 V at 85°C.

SCHMATIC
SDP8600/8601/8602 BUFFER, 10 kΩ PULL-UP

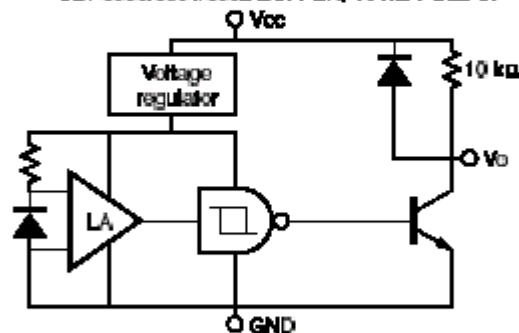

Honeywell reserves the right to make changes in order to improve design and supply the best products possible.


Honeywell

201


深圳市新世联科技有限公司

SDP86XX Optoschmitt Detector


SCHEMATIC

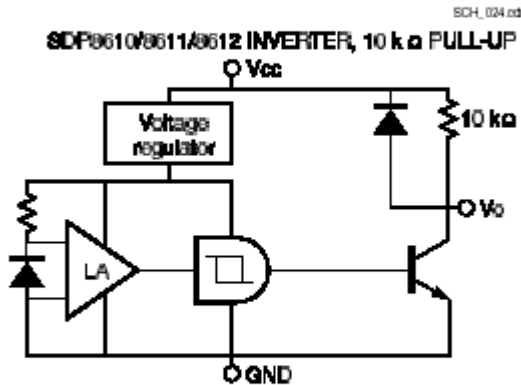

SWITCHING TIME TEST CIRCUIT

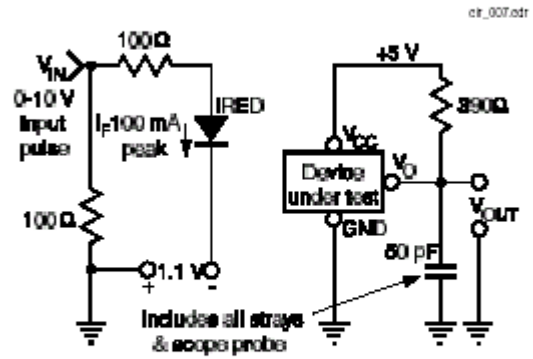

SWITCHING WAVEFORM FOR BUFFERS

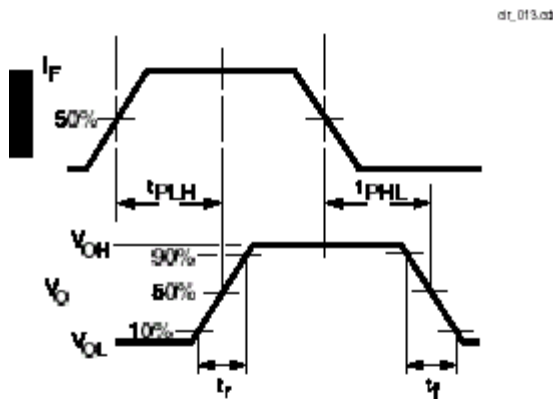

SWITCHING WAVEFORM FOR INVERTERS

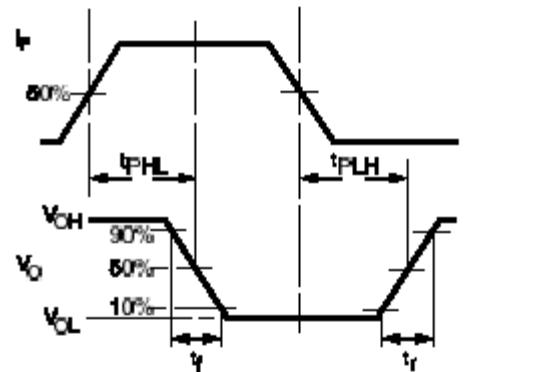


Fig. 1 Responsivity vs Angular Displacement


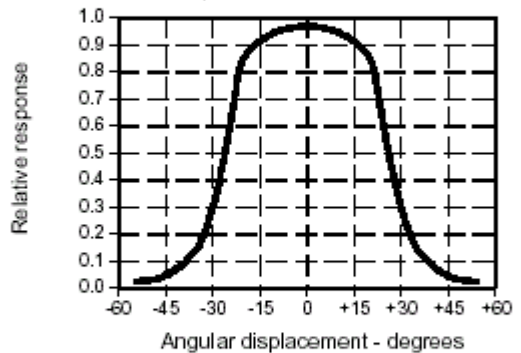


Fig. 2 Threshold Irradiance vs Temperature

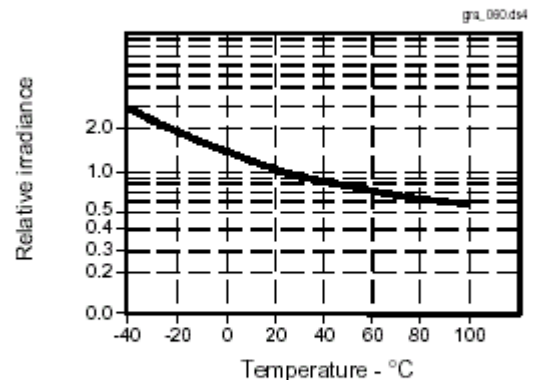

SDP86XX Optoschmitt Detector

Fig. 3 Output Rise Time (t_r) and Output Fall Time (t_f) vs Temperature gra_061.d04

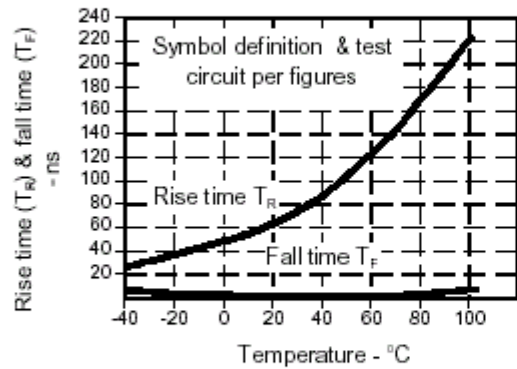


Fig. 4 Delay Time vs Temperature gra_062.d04


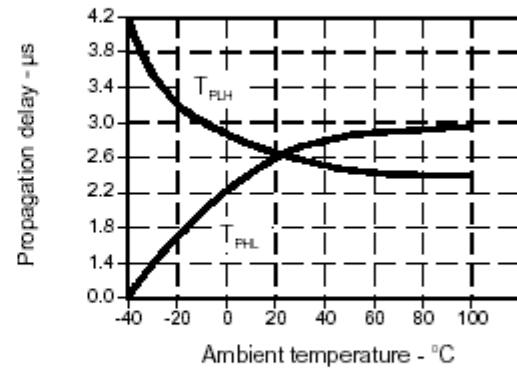


Fig. 5 Spectral Responsivity gra_060.d04

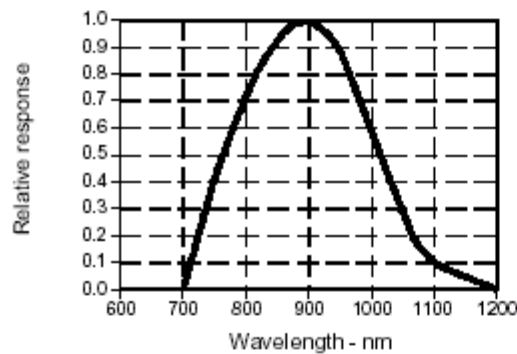

All Performance Curves Show Typical Values

Honeywell reserves the right to make changes in order to improve design and supply the best products possible.

Honeywell

203

深圳市新世联科技有限公司